



NEW TRUCK SALES
(310) 984-3950

USED TRUCK SALES
(310) 984-3970

PARTS (310) 984-3930
SERVICE (310) 984-3940

21107 S. Chico Street, Carson CA 90745

www.VelocityTruckCenters.com

Buyers Order

Deal#: DE-01207

Opp#: 2023-146870

Date:

Contact: Grant Curtis - Mobile: 714-357-4896 - Email: gcurtis@vvgtruck.com

Bill To: PROS-020174

CITY OF MENIFEE

29714 HAUN ROAD

MENIFEE CA 92586 County: Riverside

Phone: (951) 672-6777

kjones@cityofmenifee.us

Ship To:

Unit#: 1923196 Stock#: IS014904

New 2023 ISUZU NPRHD

Price:

\$61,998.00

VIN: JALC4W163P7014904

GVW: 14500

Color: WHITE

16' REEFER BODY AND RAMP (NO LIFT GATE) ON QUOTE DN0764983-4

\$28,183.00

DELIVER TO END USER

\$320.00

THERMO KING V520 20 ENGINE DRIVEN REEFER UNIT

\$18,000.00

TRANSPORT TO AND FROM MORGAN TRUCK BODY, AZ

\$1,894.00

To Be Delivered On or About: 08/31/2023

Unit Price:

\$110,395.00

Sub Total

\$110,395.00

Doc Fee

\$85.00

CA Tire Recycle Fee

\$10.50

Sales Tax (8.750%)

\$9,667.00

CA License

\$1,192.00

DMV Electronic Filing

\$33.00

Total Vehicle Sale Price **\$121,577.50**

Net Total

\$121,577.50

Lienholder: None...

NPRHD DIESEL WITH 16' REEFER BODY

*** PRICING IS SUBJECT TO CHANGE DUE TO SUPPLY CHAIN AND PRODUCTION ISSUES. ***

ONLY THOSE ITEMS AND SERVICES SPECIFICALLY WRITTEN ON THIS ORDER ARE INCLUDED IN THE STATED PRICE.

ANY OTHER AGREEMENTS, UNLESS IN WRITING, ARE NOT BINDING ON SELLER.

The numbered pages of this Order comprise the entire agreement affecting this purchase and no other agreement or understanding of any nature concerning this purchase has been made or entered into, or will be recognized. I hereby certify that no credit has been extended to me for the purchase of this motor vehicle except as appears in writing on the face of this agreement. I have read and understand the final page of this agreement and agree to it as a part of this order the same as if it were printed above my signature. I certify that I am of legal age, or older, that I have legal capacity and authority to execute this agreement on behalf of my company, and hereby acknowledge receipt of a copy of this order.

CITY OF MENIFEE

(Purchaser's Name)

Grant Curtis

(Salesperson Name)

X

(Purchaser's Signature)

(Approved By)

Date

Date

1. **TRADE-IN(S).** Purchaser shall deliver trade-in(s) in the same condition as at the time of inspection and appraisal by Seller reasonable wear and tear excepted, except as disclosed in the Agreement. Purchase represents that each truck shall be free and clear of all liens and encumbrances and warrants that the trade-in(s) are that type and condition described in this Agreement, including any attachments hereto.

2. **TERMS OF PAYMENT.** Unless otherwise agreed, net payment shall be due on delivery. Late payments shall bear interest at the rate of 18% per annum, or the maximum permitted by law, whichever is less. If acceptance of delivery is delayed by Purchaser, payment shall become due on the date when Seller is prepared to deliver. If the financial condition of Purchaser at any time does not, in the judgment of Seller, justify continuance of the work to be performed by Seller hereunder on the terms of payment as agreed upon, Seller may suspend such work, or postpone delivery, and require such assurances of Purchaser's performance as Seller deems adequate, including payment in advance, or Seller may cancel this order and shall receive reimbursement for its reasonable and proper cancellation charges. In the event of bankruptcy or insolvency of Purchaser, voluntary or involuntary, Seller shall be entitled to cancel any order then outstanding at any time and seek reimbursement for its reasonable and proper cancellation charges.

3. **CANCELLATION.** Purchaser may cancel this order only if Seller is able to cancel said order with the manufacturer, and only upon written notice. Upon cancellation or failure to accept delivery, Purchaser shall pay Seller reasonable cancellation changes and expenses, not to be less than Seller's out-of-pocket expenses including carrying costs.

4. **SALES AND OTHER TAXES.** Unless otherwise specified herein, Seller's price does not include federal excise, sales, use, or other taxes. Consequently, in addition to the price specified herein, the amount of any other excise, sales, use or other tax applicable to the sale or use of the trucks purchased hereunder shall be paid by Purchaser, or in lieu thereof Purchaser shall provide Seller with a tax exemption certificate acceptable to the taxing authorities. Purchaser agrees that all taxes related to this transaction, whether arising at the time of the transaction or in the future, are Purchaser's responsibility and further agrees to promptly pay any such taxes.

5. **DELIVERY.** All trucks furnished hereunder shall be delivered to Purchaser at the Seller's dealership location or other location as designated in this Agreement. Unless otherwise provided, delivery will be made via carriers and routes designated by manufacturer with freight charges to be included in the purchase price. Delivery dates are approximate and are based upon receipt of all necessary information from Purchaser. Seller shall not be liable for delays in delivery or manufacturing, or other causes beyond Seller's control.

6. **TECHNICAL CHANGES.** Purchaser acknowledges that the manufacturer and Seller reserve the right to change the specifications of the truck(s) at any time without obligation to make such changes in other trucks previously delivered to Purchaser. In addition, manufacturer and Seller reserve the right to make design changes and substitution of materials subsequent to the receipt of the order which, in manufacturers or Seller's opinion are necessary to improve the truck. Purchaser agrees to accept any such changes as fulfillment of Seller's obligations under this order.

7. **REQUIRED EQUIPMENT.** This order shall be deemed to include, whether or not specified herein, all equipment or accessories required by the National Highway Traffic Safety Act or other regulations in effect at the time of order of receipt. It is agreed that any additional or different equipment not specified which is required at the time of delivery to meet the foregoing Act or other regulations will be added and the costs shall be paid by Purchaser. Purchaser understands that certain safety equipment is available that is not legally required and is available at Purchaser's request for an additional fee.

8. **TITLE AND REMEDIES.** Until full payment by Purchaser of all amounts due hereunder, Seller reserves the title to all equipment furnished hereunder. If Purchaser defaults in payment or performance hereunder or becomes subject to insolvency, receivership, or bankruptcy proceedings, or makes an assignment for the benefit of creditors, or without the consent of Seller voluntarily or involuntarily sells, transfers, leases, or permits any lien or attachment on the equipment delivered hereunder, Seller may treat all amounts then or thereafter owing hereunder by Purchaser as immediately due and payable (subject only to credits required by law) and Seller may repossess said equipment by any means available by law and shall enjoy any and all other remedies of a secured creditor under the Uniform Commercial Code. Purchaser shall execute and deliver to Seller such financing statements and other documents, as Seller may deem appropriate to evidence, perfect, and protect the priority of its security interest in the truck(s) subject to this order.

9. **GENERAL.** Any assignment by Purchaser of this order or any rights hereunder, without written consent of Seller, shall be void. Clerical errors in this order may be automatically corrected by giving written notice thereof to Purchaser by a duly authorized representative of Seller. No waiver, alteration, or modification of any of the provisions hereof shall be binding unless and until in writing and signed by a duly authorized representative of Seller. To the extent not covered by other terms herein, including terms of warranty and limitation of liability, etc., the provisions of the Uniform Commercial Code shall govern this sale.

10. **IMPORT TARIFFS:** Purchaser acknowledges that any import tariffs imposed by the government are the sole responsibility of the Purchaser and will result in an increase in the Seller's price equal to the amount of the obligatory tariff.

This Agreement (including by reference the provisions set out in manufacturer's standard warranty or warranties) shall constitute the entire agreement between Purchaser and Seller, and no understandings or obligations not expressly set forth herein or in manufacturer's standard warranty or warranties are binding upon Purchaser or Seller.

ALL WARRANTIES, IF ANY, BY A MANUFACTURER OR SUPPLIER OTHER THAN SELLER ARE THEIRS, NOT SELLER'S, AND ONLY SUCH MANUFACTURER OR OTHER SUPPLIER SHALL BE LIABLE FOR PERFORMANCE UNDER SUCH WARRANTIES. SELLER HEREBY DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Accepted and Agreed by: _____ (Company Name) _____ (Date)

Signor's Name and Title: _____ (Please Print Name and Title. Must be an Officer of the company Authorized to approve capital purchases.) X _____ (Signature)



SOUTH BAY ISUZU TRUCK

Grant Curtis

CITY OF MENIFEE 16' REEFER CHASSIS



Current report content is based on data as of 2023-04-24 08:33:03. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.

NPR-HD

14,500 LBS. GVWR
CLASS 4



GVWR/GCWR	14,500/20,500 lbs.
BODY/PAYLOAD ALLOWANCE	7,686-8,456 lbs.
GAWR Front / Rear	5,360 lbs. / 9,880 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY Ratio	11,020 lbs. 4.555
SUSPENSION F/R SPRINGS Capacity	Tapered/Multi-Leaf 6,830/9,880 lbs.
SERVICE BRAKES Front/Rear	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum
EXHAUST BRAKE	Standard
FRAME RAIL - STANDARD CAB Section Modulus Resistance Bending Moment	7.20 in. ³ 316,800 lb.-in.
FRAME RAIL - STANDARD CAB Section Modulus Resistance Bending Moment	11.89 in. ³ 523,160 lb.-in.
TRANSMISSION	Aisin A465id 6-speed auto with double overdrive and lock-up 2 nd -6 th gears
ENGINE Displacement Engine Power Engine Torque Oil Level Indicator	Isuzu 4HK1-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215 hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm Dash-mounted oil level check switch and light
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	140-amp
BATTERIES	2 Maintenance-Free 750-CCA
TIRES LRR (Low Rolling Resistance)	215/85R16E (10-pr) Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK Standard Optional	30 gal. in-rail 33 gal. side mount (176 WB Only)
FUEL/WATER SEPARATOR	Dual fuel filter with dash mounted indicator light

2021 ISUZU N-SERIES

Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Body Length (ft.)
STANDARD CAB					
109.0	86.5	129.6	7.7	200.5	12
132.5	110.0	153.1	7.7	224.0	14
150.0	127.5	170.6	7.7	241.5	16-18
176.0	153.5	196.6	7.7	267.5	20
CREW CAB					
150.0	88.5	131.6	5.3	241.5	12
176.0	114.5	157.6	5.3	267.5	16





**ASK YOUR DEALER FOR
INFORMATION ON OTHER
ISUZU PROGRAMS**



WWW.ISUZUCV.COM



SCAN TO ACCESS
A DIGITAL COPY
OF THE ROADSIDE
ASSISTANCE
BROCHURE

ISUZU



ROADSIDE ASSISTANCE

24 | 7 | 365
(866) 441-9659

ROADSIDE ASSISTANCE...TO PROVIDE **PEACE OF MIND**

*24 Hours A Day, 7 Days A Week,
365 Days A Year*

Isuzu trucks are built to be the highest quality, most reliable trucks in the industry. That's why we back them with one of the strongest roadside assistance programs ever offered for medium duty trucks.

Roadside Assistance is standard for the first three years (unlimited miles) on N- & F-Series diesel trucks, and five years or 75,000 miles on gas trucks whichever comes first. Roadside Assistance is also included with any Isuzu extended warranty plan.



TOWS

Roadside Assistance provides towing to the nearest authorized Isuzu dealership, if your truck cannot be driven due to a warrantable defect.



TIRES

In the event of flat or damaged tires, Roadside Assistance provides towing to the nearest authorized Isuzu dealership that carries truck tires or to a local tire store.



BATTERIES

Roadside Assistance provides a jump start if your batteries fail.



FUEL

If you should run out of diesel fuel, gasoline, or diesel exhaust fluid, Roadside Assistance will send a tow service provider to your location. You will be responsible for the cost of the fuel or fluid.



LOCK OUT

If your keys are locked inside, Roadside Assistance will send a service provider to unlock your truck door.



CUSTOMER PAY EVENTS

In the event that your service need is not covered by Roadside Assistance, our agents will be happy to coordinate a tow (or whatever is required), to help facilitate the transaction between the tow service provider and you.



AVAILABLE 24/7

Isuzu Roadside Assistance is available 24 hours a day, 7 days a week, 365 days a year, anywhere in the United States or Canada. Just call our toll-free number and a service vehicle will be dispatched to help you get back on the road.

(866) 441-9659



Roadside Assistance does not cover winching, or tows needed due to accidents, weather related issues, or body application issues such as lift gate problems. An authorized Isuzu dealer must determine a warrantable issue for towing coverage otherwise tow charges will be the responsibility of the owner. See your authorized Isuzu dealer for details.



SOUTH BAY ISUZU TRUCK

Grant Curtis

CITY OF MENIFEE 16' REEFER CHASSIS #JALC4W163P7014904 (2023 NPR-HD Cab Chassis, 3F3 150"WB, 127.5"CA, 14,500 GVWR. White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning

Warranty

Warranty Limitations: *Time or Mileage, Whichever Comes First*

New Truck Warranty		Time in Years	Vehicle Miles
Basic		3	Unlimited
Engine		3	Unlimited
<ul style="list-style-type: none">• Transmission• Drive Axle• Driveshaft• Front Axle / Beam• Crossmembers• Flywheel Housing• Clutch Housing		3	Unlimited
Frame Rails		3	Unlimited
		5*	Unlimited*
Corrosion (Rust Through)		4	Unlimited
Roadside Assistance		3	Unlimited
		5†	100,000†
Emission Warranty		Time in Years	Vehicle Miles
Emission Control System		5	110,000
Emission Performance		5	50,000
GHG Emission		5	50,000
Tires		2	24,000

After 3 years labor and parts coverage is 50% for up to 5 years.

†Tows related to emissions issues may be covered for up to 5 years or 110,000 miles (whichever comes first).

The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date. The warranty coverages are limited by whichever occurs first. Please see your authorized Isuzu dealer for warranty details.

Current report content is based on data as of 2023-04-24 08:33:03. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



SOUTH BAY ISUZU TRUCK

Grant Curtis

CITY OF MENIFEE 16' REEFER CHASSIS #JALC4W163P7014904 (2023 NPR-HD Cab Chassis, 3F3 150"WB, 127.5"CA, 14,500 GVWR. White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning

Standard Equipment Summary

Code	Description
Tires	
I5H	LRR (low rolling resistance)
Engine	
I1B	4HK1-TC, diesel engine 317 CID (5.19L), 215 HP at 2550 RPM: 452 ft.-lb. gross torque at 1850 RPM. 4 cylinder, 16 valve, four cycle, overhead cam, turbocharged, inter-cooled, water cooled EGR valve, direct injection, electronically controlled common rail fuel system, engine cruise control function. Oil level check switch and light. Engine Warning system with audible warning for low oil pressure, high coolant temperature, and low coolant level.
Transmission	
I1W	Aisin A465id 6-speed automatic transmission, Ratios: 3.742, 2.003, 1.343,
Wheelbase	
IB1	150 inches, includes ladder type channel frame. Full C section straight frame 33.5 inches wide. Yield strength 44,000 psi; section modulus 7.20in3 RBM 316,800 lb./ft./in. per rail. 127.5"CA
Air Cleaner	
KNX	Dry Paper single element. (Donaldson brand) Air cleaner canister standard with air restriction indicator in the driver's Multi-Information Display (MID).
Alternator	
I2C	140 AMP. with integral regulator.
Battery	
IX1	Dual 12-Volt maintenance free group 31 750 CCA batteries with threaded posts
Exhaust	
IX7	Single horizontal with DPF/SCR exhaust system
Front Axle	
ID2	"I"-beam rated at 6,830 lbs. Includes integral hydraulic power steering. Ratio 18.8-20.9:1.
Front Suspension	
ID4	6,830 lb. capacity. Semi-elliptical tapered leaf springs. Includes shock absorbers and stabilizer bar.
Front Wheels	
RBV	16" X 6", 6-hole disc, painted white.
Front Tires	
I53I69	215/85R16E (10 ply) tubeless Radial, all season tread.
Rear Suspension	
I27	9,880 lbs. capacity. Semi-elliptical main and auxiliary multi-leaf springs. Includes shock absorbers
Rear Axle	
I36	R040, single-speed, 11,020 lb. capacity with oil lubricated rear wheel bearings.
Ratio	
005	4.56:1
Rear Wheels	
RBZ	16" X 6", 6-hole disc, painted white.
Rear Tires	
I53I34	215/85R16E (10 ply) tubeless Radial, all season tread.
Fuel Tank	
I4I	30 Gallon Stainless Steel In-Rail Fuel Tank
Seat	
AQB	Driver seat is reclining high back. Two single occupant fold down seats with tray backs.
Brakes	
K40	Butterfly valve type exhaust brake
IE1	Vacuum + Power Assist; hydraulic 4-wheel disc brakes with 4-channel ABS. Mechanical, transmission mounted parking

Current report content is based on data as of 2023-04-24 08:33:03. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



SOUTH BAY ISUZU TRUCK

Grant Curtis

CITY OF MENIFEE 16' REEFER CHASSIS #JALC4W163P7014904 (2023 NPR-HD Cab Chassis, 3F3 150"WB, 127.5"CA, 14,500 GVWR. White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning

Standard Equipment Summary

Code	Description
	brake. Non-asbestos semi metallic linings are standard.
Air Conditioning	
C60	Air conditioner
Power Windows & Door Locks	
IL0	Yes
Floor Mats	
IQ6	Standard Floor Mats
Model Option	
54	White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning
Assistance System	
I5I	Electronic Vehicle Stability Control (EVSC) include ASR (Anti-Slip Regulation)
Accessories	
IX2	Rear body dome lamp switch
8RP	AM/FM/CD radio with Aux input/USB port and Bluetooth RPO

Current report content is based on data as of 2023-04-24 08:33:03. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.

SOUTH BAY ISUZU TRUCK

Grant Curtis

CITY OF MENIFEE 16' REEFER CHASSIS #JALC4W163P7014904 (2023 NPR-HD Cab Chassis, 3F3 150"WB, 127.5"CA, 14,500 GVWR. White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning

Selected Model and Options

Model	Description	Weight
	NPR-HD Cab Chassis 150"WB, 127.5"CA White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning	
Options		
	"I"-beam rated at 6,830 lbs. Includes integral hydraulic power steering. Ratio 18.8-20.9:1.	0.0 lbs.
	Driver seat is reclining high back. Two single occupant fold down seats with tray backs.	0.0 lbs.
	Air conditioner	0.0 lbs.
	Yes	0.0 lbs.
	LRR (low rolling resistance)	0.0 lbs.
	4HK1-TC, diesel engine 317 CID (5.19L), 215 HP at 2550 RPM: 452 ft.-lb. gross torque at 1850 RPM. 4 cylinder, 16 valve, four cycle, overhead cam, turbocharged, inter-cooled, water cooled EGR valve, direct injection, electronically controlled common rail fuel system, engine cruise control function. Oil level check switch and light. Engine Warning system with audible warning for low oil pressure, high coolant temperature, and low coolant level.	0.0 lbs.
	Dry Paper single element. (Donaldson brand) Air cleaner canister standard with air restriction indicator in the driver's Multi-Information Display (MID).	0.0 lbs.
	Dual 12-Volt maintenance free group 31 750 CCA batteries with threaded posts	0.0 lbs.
	Single horizontal with DPF/SCR exhaust system	0.0 lbs.
	Butterfly valve type exhaust brake	0.0 lbs.
	140 AMP. with integral regulator.	0.0 lbs.
	Standard Floor Mats	0.0 lbs.
	Rear body dome lamp switch	0.1 lbs.
	AM/FM/CD radio with Aux input/USB port and Bluetooth RPO	0.0 lbs.
	Aisin A465id 6-speed automatic transmission, Ratios: 3.742, 2.003, 1.343,	0.0 lbs.
	Vacuum + Power Assist; hydraulic 4-wheel disc brakes with 4-channel ABS. Mechanical, transmission mounted parking brake. Non-asbestos semi metallic linings are standard.	0.0 lbs.
	White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning	0.0 lbs.
	Electronic Vehicle Stability Control (EVSC) include ASR (Anti-Slip Regulation)	0.0 lbs.
	R040, single-speed, 11,020 lb. capacity with oil lubricated rear wheel bearings.	0.0 lbs.
	16" X 6", 6-hole disc, painted white.	0.0 lbs.
	215/85R16E (10 ply) tubeless Radial, all season	0.0 lbs.

Current report content is based on data as of 2023-04-24 08:33:03. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



SOUTH BAY ISUZU TRUCK

Grant Curtis

CITY OF MENIFEE 16' REEFER CHASSIS #JALC4W163P7014904 (2023 NPR-HD Cab Chassis, 3F3 150"WB, 127.5"CA, 14,500 GVWR. White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning

Selected Model and Options

Description	Weight
tread.	
16" X 6", 6-hole disc, painted white.	0.0 lbs.
215/85R16E (10 ply) tubeless Radial, all season tread.	0.0 lbs.
6,830 lb. capacity. Semi-elliptical tapered leaf springs. Includes shock absorbers and stabilizer bar.	0.0 lbs.
9,880 lbs. capacity. Semi-elliptical main and auxiliary multi-leaf springs. Includes shock absorbers	0.0 lbs.
4.56:1	0.0 lbs.
150 inches, includes ladder type channel frame. Full C section straight frame 33.5 inches wide. Yield strength 44,000 psi; section modulus 7.20in3 RBM	0.0 lbs.
316,800 lb./ft./in. per rail. 127.5"CA	
30 Gallon Stainless Steel In-Rail Fuel Tank	0.0 lbs.
Fire Extinguisher and Triangle Kit mounted in rear organizer on standard cab and under rear seat on crew cab	19.0 lbs.
Back up alarm	1.0 lbs.
Engine emergency shutdown system HWT, LWL, LOP	0.0 lbs.
Heated dual remote control mirrors (17" head)	4.0 lbs.
Spare keys (2 additional, 4 keys in total)	0.0 lbs.

Current report content is based on data as of 2023-04-24 08:33:03. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.




SOUTH BAY ISUZU TRUCK

Grant Curtis

CITY OF MENIFEE 16' REEFER CHASSIS #JALC4W163P7014904 (2023 NPR-HD Cab Chassis, 3F3 150"WB, 127.5"CA, 14,500 GVWR. White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning

Weight Distribution

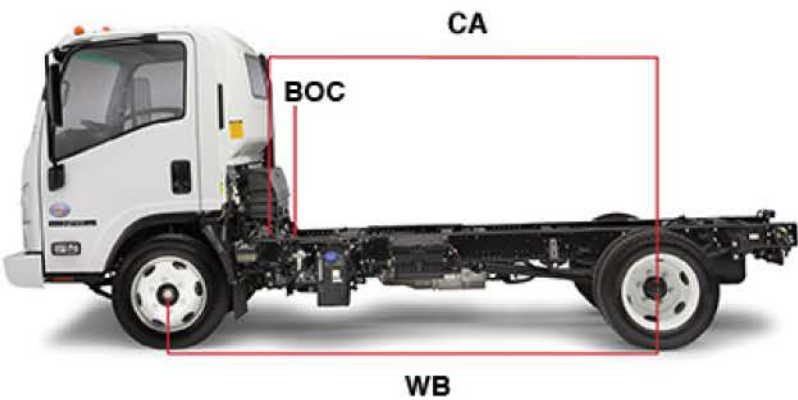

Front Wt.	5,282.90 lbs.	55%
Rear Wt.	4,266.10 lbs.	45%
GVWR	14,500.00 lbs.	
GVW	9,549.00 lbs.	
Remaining Payload Weight	4,951.00 lbs.	

Driver/Passenger Weight	350.0 lbs.
Wheelbase (WB)	150 inches
Cab-to-Axle (CA)	127.5 inches
Body Length	16 Feet
Body Weight	2,400.0 lbs.
Back of Cab (BOC)	7.7 inches

Weight (lbs.)	Front	Rear	Total
Chassis	4,130.00	1,973.00	6,103.00
Chassis Equipment	23.00	1.00	24.00
Subtotal	4,153.00	1,974.00	6,127.00
Driver/Passengers	350.00	0.00	350.00
Body/Body Equipment	779.90	2,292.10	3,072.00
Payload	0.00	0.00	0.00
Total	5,282.90	4,266.10	9,549.00
GAWR/GVWR	5,360.00	9,880.00	14,500.00
GCWR			20,500.00

Chassis Equipment:

Code	Item	Center of Gravity	Front Axle	Rear Axle	Total
54	White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning		0.00 lbs.	0.00 lbs.	0.00 lbs.
IF6	Fire Extinguisher and Triangle Kit mounted in rear organizer on standard cab and under rear seat on crew cab		19.00 lbs.	0.00 lbs.	19.00 lbs.
UZF	Back up alarm		0.00 lbs.	1.00 lbs.	1.00 lbs.
IH2	Engine emergency shutdown system HWT, LWL, LOP		0.00 lbs.	0.00 lbs.	0.00 lbs.
I0W	Heated dual remote control mirrors (17" head)		4.00 lbs.	0.00 lbs.	4.00 lbs.
I3Z	Spare keys (2 additional, 4 keys in total)		0.00 lbs.	0.00 lbs.	0.00 lbs.
I4I	30 Gallon Stainless Steel In-Rail Fuel Tank		0.00 lbs.	0.00 lbs.	0.00 lbs.

Driver/Passengers:

	Center of Gravity	Front Axle	Rear Axle	Total
Driver	front axle	350.00 lbs.	0.00 lbs.	350.0 lbs.

Body/Body Equipment:

Code	Item	Center of Gravity	Front Axle	Rear Axle	Total
	Body	24 inches in front of the rear axle	380.80 lbs.	2,019.20 lbs.	2,400.00 lbs.
	reefer unit	front of body	399.33 lbs.	100.67 lbs.	500.00 lbs.
	12' walk ramp	72 inches in front of the rear of body	-0.23 lbs.	172.23 lbs.	172.00 lbs.

Current report content is based on data as of 2023-04-24 08:33:03. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



SOUTH BAY ISUZU TRUCK

Grant Curtis

CITY OF MENIFEE 16' REEFER CHASSIS #JALC4W163P7014904 (2023 NPR-HD Cab Chassis, 3F3 150"WB, 127.5"CA, 14,500 GVWR. White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning

Turning Circle

Specification Summary	
Model	3F354
Front Axle ID2	"I"-beam rated at 6,830 lbs. Includes integral hydraulic power steering. Ratio 18.8-20.9:1.
Wheelbase IB1	150 inches, includes ladder type channel frame. Full C section straight frame 33.5 inches wide. Yield strength 44,000 psi; section modulus 7.20in3 RBM 316,800 lb./ft./in. per rail.
Front Wheels RBY	16" X 6", 6-hole disc, painted white.
Front Tires I53I69	215/85R16E (10 ply) tubeless Radial, all season tread.

Current report content is based on data as of 2023-04-24 08:33:03. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.




SOUTH BAY ISUZU TRUCK

Grant Curtis

CITY OF MENIFEE 16' REEFER CHASSIS #JALC4W163P7014904 (2023 NPR-HD Cab Chassis, 3F3 150"WB, 127.5"CA, 14,500 GVWR. White, 30 Gallon Stainless Steel In-Rail Fuel Tank with power windows, power door locks and air conditioning

Turning Circle

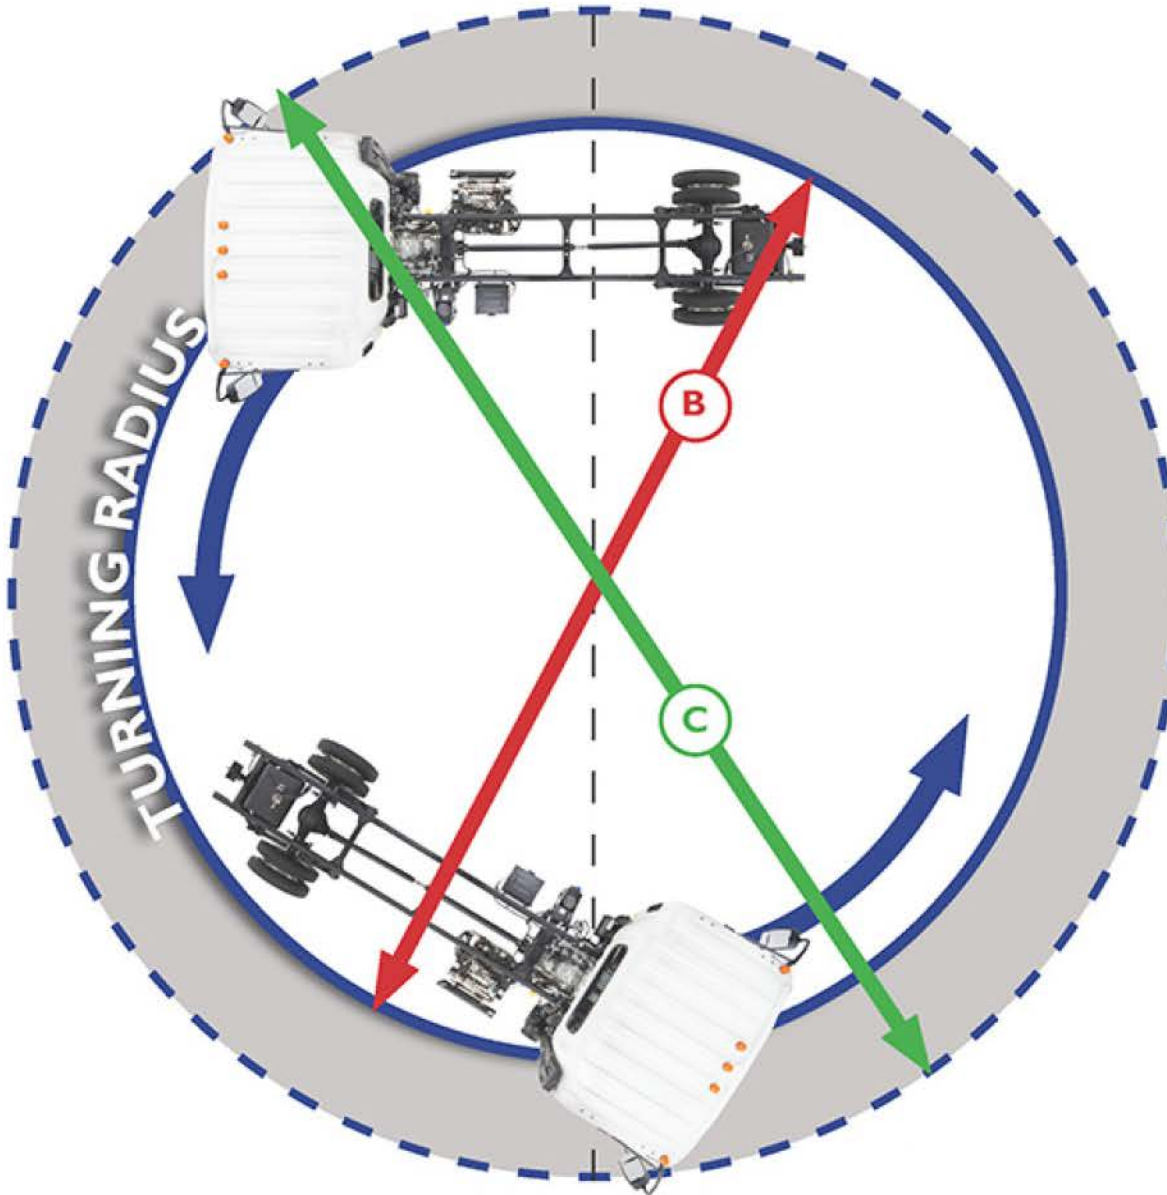

A: Inside Wheel Cut Angle: 49.50°

B: Minimum turning diameter, Curb to Curb: 42.70'
Curb to Curb diameter is measured from the outside of the front tire.

C: Minimum turning diameter, Wall to Wall: 48.90'
Wall to Wall diameter is measured from the outermost part of the cab.

Current report content is based on data as of 2023-04-24 08:33:03. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.

**DN-0764983-4**Quoted By: Ana Keene
Created: 4/21/2023
Revised: 4/21/2023

7888 Lincoln Ave • Riverside, CA 92504 • Phone: 951-689-0800 • Fax: • www.morgancorp.com

Configuration: GVSR091016096
View 3D Link:
Reference:

Regional Sales Manager: ANA KEENE

Technical Service Rep: NICK BARBER

CustomerSOUTHBAY TRUCK CENTER
21107 CHICO STREET

CARSON, CA 90745

Customer Number: 261416
Terms: N30**Contacts**Quote: Grant Curtis
p.Ship to:
p.**Ship To**THERMO KING
6118 ALCOA AVE

LOS ANGELES, CA 90058

Shipping Method: Delivery/Driveaway

Model**GVSR09116096****Description****REFRIGERATED VAN BODY 16FT NOMINAL****Plant****AZ - Ehrenberg****Body Dimensional Information** **Chassis Information**

Body Dimensional Information		Chassis Information		Chassis	
				Pickup? No	
Inside Height:	86	Make:	ISUZU	Year:	2023
Inside Length:	187	Model:	NPR HD Diesel (2011 and Newer Model) 14,500 GVWR (NF1, NF2, NF3, NF4)	WB:	150
Inside Width:	89.15	Expected Date:		FW:	33.5
Rear Door Opening (W x H):	82Wx76.38H	Color:	WHITE	CA:	128
		Rear Axle:	Single (1)	FOB:	119
		Air Horns on Cab	No	Vert. Exh.:	No
		Roof:			

Note: Body dimensional information above for reference only. These dimensions may change based on any special pricing items included in this quotation.

Specifications

*** Special Pricing items included shown in italics below ***

[DN-0764983-4]

OPTION	DESCRIPTION	QTY	Weight**
MBB Assembly	REFRIGERATED VAN BODY 16FT NOMINAL	1	0.001
Subframe {RFR}	3" I BEAM CROSSMEMBERS 12" CENTERS WITH 4" JUNIOR LONGRAIL	1	494.62
SUBFRAME	MYLAR TAPE IS APPLIED BETWEEN ALL STEEL SUBFRAME COMPONENTS AND EXTRUDED ALUMINUM LOWER BOTTOM RAILS TO PREVENT CORROSION	1	0.17
MOUNTING	FULL MOUNT-U BOLT	1	89.86
	SPECIAL LOCATION AND CONFIGURATION OF FOREMOST U-BOLTS FOR ISUZU N/GMC LCF SERIES REGULAR CAB	1	5.41
	WOODEN CRUSHER BLOCKS IN THE CHASSIS FRAME AT EACH U-BOLT	8	13.84
	MUDFLAPS-24"X30" BLACK MORGAN	1	16.62
FLOOR	ALUMINUM EXTRUDED INVERTED T ANTI-SKID WITH 6" SCUFF	1	416.77
MOUNTING	UNDERCOATING WATER BASED UNDERCOATING APPLIED TO ROADSIDE AND CURBSIDE EXTERIOR AND INTERIOR OF LONG RAILS AND WHEEL PANS, AS APPLICABLE, EXCLUDING ALL OTHER FLOOR AND SUBFRAME EXTERIOR COMPONENTS	16	6.56
THRESHOLD	STAINLESS FLUSH TO REAR WITH THERMOBREAK AND COMPOSITE BUILDUP	1	134.53
REAR DOOR	TODCO TODCOLD 1 1/8" 82" WIDE X 76 3/8" HIGH	1	196.439
REAR FRAME	HEADER SUB-COMPONENT FOR REEFER WITH OVERHEAD DOOR STAINLESS STEEL 12.25 HIGH	1	71.84
	POST SUB-COMPONENT FOR REEFER WITH OVERHEAD DOOR STAINLESS STEEL, FOR 91 HIGH	1	97.71
	ENDPLATE SUB-COMPONENT WITH OVERHEAD DOOR	1	15.26

Quotation Number: QN-0674330-1

Page 1 of 5

Printed: 4/21/2023 5:12:03 PM EDT

**DN-0764983-4**

Quoted By: Ana Keene

Created: 4/21/2023

Revised: 4/21/2023

7888 Lincoln Ave • Riverside, CA 92504 • Phone: 951-689-0800 • Fax: • www.morgancorp.com

	FOAM DAMS FOR OVERHEAD DOOR REAR	1	1.52
SKINS-SIDES	.040 ALUMINUM PREPAINTED WHITE	1	123.84
	RIVETS FOR FRONT AND SIDEWALLS-16 BODY	1	3.15
SIDE WALL	EXTRUDED ALUMINUM TOP AND BOTTOM RAILS WITH 1 3/8 IN. DEEP EXTRUDED ALUMINUM Z-SHAPED VERTICAL POSTS INSTALLED ON 16 IN. CENTERS CURBSIDE.	1	76.35
	EXTRUDED ALUMINUM TOP AND BOTTOM RAILS WITH 1 3/8 IN. DEEP EXTRUDED ALUMINUM Z-SHAPED VERTICAL POSTS INSTALLED ON 16 IN. CENTERS ROADSIDE.	1	76.35
SCUFF	SCUFF-SIDE INTERLOCKING EXTRUDED ALUMINUM SCUFF	2	32.56
Scuff Height Note GVS	SIDE SCUFF HEIGHT TOTALS 12 INCH HIGH	1	0.0001
INTERIOR TIES	SERIES E-TRACK SURFACE MOUNTED ON SIDE WALL	2	68.62
Cargo Track Sides Row 1 Loc Note	LOCATE SURFACE MOUNTED ROW AT 30 IN. FROM TOP OF FLOOR TO CENTER OF TRACK	1	0.001
SCUFF	SCUFF-FRONT INTERLOCKING EXTRUDED ALUMINUM SCUFF	1	7.76
FRONT END	AERODYNAMIC STAINLESS RADII Z-POST	1	46.27
SKINS-FRONT	.040 ALUMINUM PREPAINTED WHITE	1	25.64
SCUFF	FRONT SCUFF FOR 3" WALL WITH INVERTED T FLOOR	1	7.73
Insulation {RFR} - Front	URETHANE FOAM-FRONT 4 IN. FOAM	1	TBD
INSULATION	URETHANE FOAM-SIDE 3.00 IN.	2	78.86
	URETHANE FOAM-CEILING 3.00 IN.	1	90.33
	URETHANE FOAM-FLOOR 4.00 IN.	1	168.26
	URETHANE FOAM-REAR 3.00 IN.	1	31.68
LINER-SIDE	GLASSBOARD NO DOOR	2	130.68
LINER-FRONT	GLASSBOARD	1	26.42
Reefer Openings	REFRIGERATION OPENING THERMO KING-TWO PIECE SPECIAL COSTED	1	TBD
REEFER	CUSTOMER TO SUPPLY AND INSTALL REFRIGERATION UNIT	1	0.001
R e e f e r Reinforcement	REFRIGERATION REINFORCEMENT SPECIAL COSTED FRONT WALL MOUNTED	1	TBD
S E R V I C E PLATFORM	CAB MOUNTED SERVICE PLATFORM	1	14.91
REEFER	(4) FOLDING STEPS AND GRAB HANDLE MOUNTED ON FRONT RADIUS	1	28.57
ROOF	PLASTIC DORMER NO OPENING FOR 2-PIECE REEFER UNIT	1	17.75
	.032 ONE PIECE ALUMINUM SHEET WITH ROOF BOWS ON 24IN. CENTERS	1	75.91

**DN-0764983-4**

Quoted By: Ana Keene

Created: 4/21/2023

Revised: 4/21/2023

7888 Lincoln Ave • Riverside, CA 92504 • Phone: 951-689-0800 • Fax: • www.morgancorp.com

	WITHOUT RADII, USED IN CONJUNCTION WITH DORMER	1	8.86
INTERIOR LIGHTS	INTERIOR LED DOMELIGHT 18" W/MOTION SENSOR MORGAN SUPPLIED NO SWITCH	1	8.125
	TOTAL DOMELIGHT(S) = 1;	1	0.001
WALKRAMP	ALUMINUM HA-400-14 VENTILATED REINFORCED WALKRAMP	1	150.5
MOUNTING	IF CHASSIS HAS REAR FUEL TANK, 3.25" MOUNT WOOD NEEDED SO THAT WALKRAMP CLEARS FUEL TANK FITTING. EXTRA MOUNT WOOD MAY BE NEEDED FOR LIFTGATE HEIGHT, TIRE CLEARANCE, ETC. IF CHASSIS HAS SIDE FUEL TANK, USE STANDARD MOUNTING UNLESS OTHERWISE NOTED.	1	0.001
WALKRAMP	WALKRAMP TODCO SPRING ASSISTANCE	1	20
UNDERRIDE	4" SQUARE ANTI-SKID TUBE WITH 20" UPRIGHTS/30.5" SPREAD	1	80.02
	WALKRAMP REINFORCEMENT CHANNEL	1	10.42
EXTERIOR LIGHTS	PER FMVSS-108 REEFER TECNIQ MODEL S37 LED WITH RETURN GROUND. LIGHTS MOUNTED WITH MOUNTING BRACKETS.	1	7.626
	COMPONENTS USED FOR CHASSIS WIRING AND LIGHTS INT/GRND	1	7.53
PAINT	REEFER REAR ENDPLATE-BLACK	1	0.001
DECALS	MORGAN LOGO AND SAFETY DECALS-FULL MOUNT	1	0.11
SAFETY ITEMS	ALUMINUM 12" GRAB HANDLE-BOLTED	2	1.02
	GRAB HANDLE MOUNTED ON CURBSIDE AND ROADSIDE REAR	1	0.001
	CONSPICUITY TAPE INSTALLATION	1	0.41
	BOTH SIDES OF BODY, ACROSS BOTTOM OF REAR DOOR, UNDERRIDE PROTECTOR, AND TWO INVERTED L's ON THE UPPER OUTBOARD CORNERS. PER DRAWING CONSP00	1	0.001
MISCELLANEOUS	FUEL NECK INSTALLATION	1	0.81
SAFETY ITEMS	CUSTOMER HAS DECLINED SIDE GUARD OPTION ON THIS ORDER	1	0.001
	NOTE: MORGAN OFFERS A SIDE-GUARD SAFETY OPTION FOR THIS VEHICLE CONFIGURATION. IT IS RECOMMENDED THAT YOU VERIFY LOCAL ORDINANCES REGARDING SIDE GUARDS ON TRUCK BODIES IN LOCATIONS WHERE YOUR VEHICLE(S) MAY BE OPERATING. ASK YOUR MORGAN SALESPERSON FOR MORE INFORMATION RELATED TO SIDE-GUARD PROTECTION.	1	0.001
	REAR VIEW CAMERA OBSERVATION SYSTEM INSTALLATION ONLY FOR FACTORY ISUZU CAMERA PART # HCE-C1100 IN STAINLESS STEEL REAR FRAME OVERHEAD DOOR REEFER. CHASSIS MUST BE ORDERED AND ARRIVE AT MORGAN WITH OPTION CODE I1V (AUDIO SYS. UPGRADE) AND/OR I2V (REAR VIEW CAMERA) AND CANNOT BE RETROFIT LATER.	1	7.121
	REAR VISION CAMERA INSTALLED ON STAINLESS STEEL REAR FRAME	1	0.001
MOUNTING	CHASSIS FRAME EXTENSION - 6" CHANNEL FRAME ISUZU/GMC LCF SERIES	1	117.51
SURCHARGES	QUOTE INCLUDES SURCHARGES OF \$850	1	0.001
Special Engineering Item	SPR319756 CUSTOMER SUPPLIED AND INSTALLED V-520 REEFER	1	
	WLG 04/21/23 OK TO QUOTE	1	

Total Body Weight: TBD

CONTACT MORGAN FACTORY REP FOR TOTAL BODY WEIGHT

NOTES TO CUSTOMER:



DN-0764983-4

Quoted By: Ana Keene
Created: 4/21/2023
Revised: 4/21/2023

7888 Lincoln Ave • Riverside, CA 92504 • Phone: 951-689-0800 • Fax: • www.morgancorp.com

As a condition of sale, Morgan may require an up-front deposit representing up to 30% of the purchase price listed on this Quote for material that is "special order" or "unique" (e.g., items not readily transferrable by Morgan for other use), due and payable to Morgan prior to processing Customer's order.

Production dates for all orders requiring a chassis are subject to change at Morgan's sole discretion if full and accurate chassis Vehicle Identification Number(s) ("V.I.N.") and their matching Purchase Order number are not received by Morgan at least thirty (30) days prior to an originally scheduled production date.

DIMENSIONAL DATA: All dimensions, weights, and measurements specified herein are estimates and are subject to Morgan's manufacturing tolerances, may change without notice, and may vary depending on options selected. Please contact Morgan for dimension, weights, and measurements for your particular truck body and chassis.

NOTICE: Morgan Truck Body, LLC manufactures all vehicles to conform to applicable U.S. Federal Motor Vehicle Safety Standards (FMVSS) in effect at time of manufacture. Buyer/end-user is responsible for ensuring this vehicle, when operated, meets all applicable federal, state and local rules, regulations and statutes, including, but not limited to, those governing safety equipment, cargo securement, and accessories.

Morgan will give Customer a notice of release ("Release Notice") of their completed truck body units ("Vehicles") and Customer will remove, or authorize Morgan to remove, the Vehicles from Morgan's lot within five (5) days of the date thereof. After which time, and pursuant to Morgan's Standard Sales Agreement, Morgan shall not be responsible for any loss or damage thereto, for any reason, including, but not limited to, such loss or damage caused by fire, flood, storm, act of God, vandalism, accident, explosion, war, strike, civil or military authority, or any other similar causes.

In addition, Customer agrees to reimburse Morgan's then current lot lease expenses for every month past fourteen (14) days of the date of the Release Notice that the Vehicles remain on Morgan's lot. Customer also agrees to pay Morgan for all costs incurred, after fourteen (14) days of the date of the Release Notice, to maintain the Vehicles in satisfactory (road-worthy) working order.

Morgan shall not be responsible nor otherwise be held liable for cargo loss, loss of use, property damage, commercial (economic) loss, or other direct, indirect, incidental, consequential, or special damages alleged to have been caused by any Morgan product, or any delay in delivery of such product.

Morgan reserves the right to increase the quoted prices based on increases in prices charged to Morgan by its suppliers as of the date of Morgan's receipt of the chassis and all customer supplied material (if any). In the occurrence of Goods ordered without chassis (i.e., flat-bed pick-ups/deliveries), Morgan reserves the right to increase the quoted prices based on increases in prices charged to Morgan by its suppliers anytime up to start of production of the Goods.

Morgan's and SOUTHBAY TRUCK CENTER'S Standard Sales Agreement Terms and Conditions apply to this quote. Copies available [Morgan's Sales Agreement Terms and Conditions](#) and upon request. Any additional or different terms proposed by Buyer are objected to and are hereby rejected.

Prices in USD

Body:	\$ 27,464.00
Freight:	\$ 719.00
Unit Price:	\$ 28,183.00
X QTY	1
Total Quote Price:	\$ 28,183.00

Quote includes commodity and inbound freight surcharges of \$850

Quote is valid for 30 days, and is subject to Morgan's Sales Agreement Terms and Conditions.

**Price quoted does not include applicable taxes.
Applicable taxes will be added at time of invoice.**

Customer Acceptance of Proposal - The pricing, specifications, and conditions of this quotation are satisfactory and are hereby accepted. We authorize Morgan to perform the work as specified. However, if full, 17 digit VIN (Vehicle Identification Number) is not provided to Morgan before at least 60 days of estimated chassis arrival date, Morgan reserves the right to delay the processing of this order.

We (Customer) authorize and agree to allow Morgan to send email communication to us regarding chassis status and updates.



DN-0764983-4

Quoted By: Ana Keene

Created: 4/21/2023

Revised: 4/21/2023

7888 Lincoln Ave • Riverside, CA 92504 • Phone: 951-689-0800 • Fax: • www.morgancorp.com

Customer Signature:	Date of Acceptance:	Customer PO Number:
---------------------	---------------------	---------------------

PO and Chassis Details:

* Chassis Expected Date:

#	* PO #	* Chassis VIN	Customer Unit #	Chassis Factory #
1				

** PO #, Chassis VIN #, and Chassis Expected Date are required when placing an order with Morgan Corporation. Please provide if not listed above.*

Additional Specifications Included in Price:

***WARNING:**The above Distributor added or installed options WILL NOT UPLOAD to Morgan, and Morgan will not be responsible for any information in this **Additional Specifications Included in Price** section.



Effective May 27, 2021

Subject: **Addendum to All Morgan Quotes**

Prices set forth on this quote shall remain firm if:

(i) this quote is accepted in writing within thirty (30) days after the date set forth on the quote, and (ii) Morgan receives the chassis and any customer supplied materials required to produce the Goods within ninety days (90) days after the date of acceptance of the Quote. If either of the foregoing two conditions are not timely met, then Morgan may adjust prices, and the final prices shall be those set forth in writing by Morgan as of the date Morgan has received both the chassis and the customer supplied materials required to produce the Goods (if any). Notwithstanding the foregoing, Morgan reserves the right to also add a commodity surcharge to Invoices at time of chassis receipt based on increases in commodity prices.

Morgan's Standard Sales Agreement Terms and Conditions apply to this Quotation. Copies available upon request. Any additional or different terms proposed by Buyer are objected to and hereby rejected.

Sincerely,

Tom Moyer
Director of Sales and Customer Service
Morgan Truck Body, LLC